



Rec'd PCT/INTO 18 JAN 2005
PCT/IB 039 018 80
31.05.03 #2



INVESTOR IN PEOPLE

The Patent Office
Concent House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

H. Behan

Dated 25 April 2003

BEST AVAILABLE COPY

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

The
Patent
Office

1/77

THE PATENT OFFICE
A
16 JUL 2002
NEWPORT

16JUL02 E733651-8 D02833
P01/7700 0.00-0216474.7

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference PH/8152

2. Patent application number
(The Patent Office will fill in this part)

16 JUL 2002

0216474.7

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Nokia Corporation
Keilalahdentie 4, FIN-02150,
Espoo, Finland.

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

Finland

7652217001

4. Title of the invention

Flexible Cover

5. Name of your agent (if you have one)

Swindell & Pearson

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

48 Friar Gate,
Derby DE1 1GY

Patents ADP number (if you know it)

00001578001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number.

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	0
Description	7 ✓
Claim(s)	2 ✓
Abstract	0
Drawing(s)	4 + 4

10. If you are also filing any of the following, state how many against each item.

Priority documents	
Translations of priority documents	
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	
Request for preliminary examination and search (Patents Form 9/77)	1
Request for substantive examination (Patents Form 10/77)	
Any other documents (please specify)	

11.

I/We request the grant of a patent on the basis of this application.

Signature

Swindell & Pearson

Date 15/07/02

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. P. Higgin - 01332 367051

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

Flexible Cover

The present invention relates to a cover for a hand-portable appliance and the hand-portable appliance with the cover. It particularly relates to a cover for a mobile phone and a mobile phone with cover.

There has been a trend in the mobile phone industry towards giving users the ability to alter the appearance of their phone. One way of adapting the phone's external appearance is to fit a leather sack-like cover over the exterior of the phone. These external covers protect the exterior plastic cover from damage and allow some adaptation of the phone's appearance, however, they significantly increase the bulk and weight of the phone. Another way of adapting the phone's external appearance is to provide user replaceable rigid plastic covers as described in US6347218. The replaceable covers have proven to be very popular and the phone is now becoming a fashion accessory which is worn and/or displayed by a user.

Figure 1a shows an example of a prior art phone 2 comprising an engine assembly 10 enclosed by a removable rigid plastic front cover 4 and a removable rigid plastic back cover 8. A loose keypad 6 overlies switches 14 (key domes) of the engine assembly 10 and is held in place by the rigid plastic front cover 4 in the assembled phone 2. The components of the prior art phone 2, and the engine assembly in particular, are schematically illustrated in Figure 2. The engine assembly 10 is in physical connection with the keypad 6 as shown by arrow A. The engine assembly 10 comprises a plurality of keyboard switches 14 electrically connected to a processor 20, a battery 30 electrically connected to at least the processor 20 for power distribution to other circuitry, a SIM card 28 electrically connected to the processor 20, a display 12 electrically connected to the processor 20, a memory 26 electrically connected to the processor 20, radio transceiver circuitry 24 for communicating in a cellular communications network is electrically connected to the processor 20 and an audio part 22 is electrically connected to the processor 20. The audio part 22 provides an electrical signal to the speaker 16 and receives an electrical signal from the

microphone 18. The inter-operation of these parts to operate as a cellular mobile phone is well known to persons skilled in the art, who will additionally appreciate that although a GSM compliant engine assembly 10, as in this example, has a SIM card 28 it may not be present in engine assemblies for other cellular communication standards.

Figure 1b shows an alternative design of covers for the phone 2. In this example, the rigid plastic back cover 8 is permanently attached to the engine assembly 10 and is not removable. The rigid plastic front cover 4 is removable and a loose keypad 6 is located between it and the engine assembly 10 when the phone 2 is assembled.

The rigid plastic covers 4 and 8 are three-dimensional and provide a recognisable shape to the phone. They additionally may protect the engine assembly 10 against damage and water ingress and are easily made by injection moulding. For these reasons rigid covers, and plastic covers in particular, are universally used to enclose the engine assembly 10.

The inventor has realised that it would be desirable to have a greater range of fashionable phones. In particular, the inventor has realised that it would be desirable to allow a user greater choice in adapting the appearance of their phones.

According to one aspect of the present invention there is provided a mobile phone comprising: an engine assembly comprising a display and a plurality of switches; and a flexible cover overlying, without an intermediate rigid cover, and snugly fitting the engine assembly comprising an aperture aligned with the display and an integrated keypad, for user input, aligned with the plurality of switches.

The flexible cover may be three dimensional and used to define the appearance and/or shape of a phone. Embodiments of the invention therefore provide for a greater range of fashionable phones without compromising the

existing prejudice in the technical field in favour of using rigid plastic covers. The absence of a rigid plastic cover, provides the user with better tactility as the flexible cover may be deformable in response to a user's touch..

The flexible cover may be made from fabric, leather, elastomeric material or any other flexible material which is sufficiently durable and attractive to a user. The engine assembly and flexible cover may have corresponding projections and receptacles so that in the assembled mobile phone, the flexible cover is correctly aligned on the engine assembly. The flexible cover may have a substrate on its interior surface to improve its waterproof and/or shock-absorbing properties. This material may be elastomeric.

The inventor has additionally recognised similarities between the training/running shoe industry and the mobile phone industry. Trainers were initially bought by serious athletes, but they are now an established fashion accessory and their fashionable appearance is important. Likewise, the inventor has realised that mobile phones were initially bought by businessmen, but that they are now starting to become fashion accessories. The inventor has recognised that this trend will continue for mobile phones. According to one embodiment of the present invention, the flexible cover is made in accordance with the same techniques used in the training/running shoe industry. Thus the flexible cover may appear similar to a training/running shoe.

For a better understanding of the present invention, reference will now be made by way of example only to the accompanying drawings in which:-

Figs. 1a and 1b illustrate prior art user replaceable plastic covers for a mobile phone;

Fig. 2 is a schematic illustration of a prior art phone;

Fig. 3 illustrates an embodiment of a flexible cover;

Fig. 4 illustrates a cut away portion of the flexible cover of Fig. 3;

Fig. 5 illustrates a mobile phone comprising an engine assembly and a flexible cover; and

Fig. 6 is a schematic illustration of a mobile phone comprising an engine assembly and a flexible cover.

Fig. 3 illustrates a flexible cover 40 which is sized to fit snugly over an engine assembly 10 for a mobile phone. The engine assembly 10 comprises substantially all of the phone's circuitry. The flexible cover 40 is formed from flexible material that is shaped to define an internal cavity 44.

An insertion aperture 46 through the material of the flexible cover 40 provides access to the internal cavity 44. The insertion aperture 46 is used to insert an engine assembly into the internal cavity 44. The flexible cover 40 has a display aperture 42 through the material of the flexible cover 40. When the engine assembly is fully inserted into the cavity 44 of the flexible cover 40, the display 12 of the engine assembly 10 is visible through the display aperture 42 as shown in Fig. 5. The flexible cover 40 has one or more speaker apertures 52 through the material of the cover to the internal cavity 44. When the engine assembly 10 is fully inserted into the cavity 44 of the flexible cover 40, the speaker aperture(s) 52 are aligned with the speaker 16 of the engine assembly 10, as shown in Fig. 5. The flexible cover 40 has a microphone aperture 54 through the material of the flexible cover 40 to the cavity 44. When the engine assembly 10 is fully inserted into the cavity 44 of the flexible cover 40, the microphone aperture 54 of the flexible cover 40 is aligned with the microphone 18 of the engine assembly 10.

The flexible cover 40 has a plurality of key portions on which indicia are carried. The plurality of key portions forms a keypad which is integrated into the material of the flexible cover 40. The keypad includes a three column by 4 row array 48 of separate key portions which correspond to the normal 3 by 4 array of keys on a mobile phone for data entry. The keypad also includes a plurality of key portions 50 located between the array 48 of key portions and

the display aperture 42. These key portions correspond to the functional keys and/or soft keys commonly found in mobile phones. Each one of the key portions of the keypad is associated with at least one of the key board switches 14 of the engine assembly 10. Thus, when the engine assembly 10 is fully inserted into the cavity 44 of the flexible cover 40, each one of the key portions of the flexible cover 40 directly overlies at least one keyboard switch 14 of the engine assembly 10. Thus, if a user depresses a key portion of the flexible cover 40 it actuates a keyboard switch 14 of the engine assembly 10.

The flexible cover 40 is sized and dimensioned so that it fits very closely and snugly to the engine assembly 10 and forms a decorative enclosure for the engine assembly 10. The flexible cover 40 is therefore analogous to a "skin". The flexible cover 40 preferably has direct contact with the engine assembly 10. A plastic cover does not intercede between the fabric cover 40 and the engine assembly 10.

The flexible cover 40 may be made from a mouldable elastomer, from fabric or from embossed leather. The flexible cover 40 may have stitching, zips, poppers or velcro. Preferably, the flexible cover 40 is designed so that the insertion aperture 46 may be closed after the engine assembly 10 has been fully inserted into the cavity 44. The closure of the insertion aperture 46 may be provided by tie up laces (as in a shoe), a zip, poppers or velcro.

The flexible cover 40 is preferably formed from one piece of fabric or leather and is constructed in a similar fashion to a sports shoe e.g. with polyurethane printing of logos and indicia onto the surface of the flexible cover 40.

Fig. 4 illustrates a cut away portion of one embodiment of the flexible cover 40 illustrated in Fig. 3. The relationship of Fig. 4 to Fig. 3 can be understood by imagining slicing the flexible cover 40 in half lengthways (across its depth) and turning over the uppermost portion of the flexible cover 40. Thus, Fig. 4 illustrates the interior of the cavity 44 of the flexible cover 40. An elastomeric sheet 64 is permanently attached to the interior of the flexible

cover 40 in the region corresponding to the key portions. The elastomeric sheet 64 is a moulded substrate and has a plurality of elastomeric projections 62. There is at least one projection 62 associated with each key portion. The engine assembly 10 has a corresponding plurality of receptacles in its upper surface (illustrated in Fig. 1b). When the engine assembly 10 is fully inserted into the flexible cover 40 each one of the elastomer projections 62 is received in one of the corresponding receptacles of the engine assembly 10. Each receptacle in the engine assembly 10 is located at a keyboard switch 14. Thus, when the engine assembly 10 is fully inserted into the flexible cover 40 the elastomer projections are received in the receptacles and aligned with the keyboard switches 14. This ensures, in the assembled phone 2, that when a key portion is pressed it actuates a keyboard switch. 14. The reception of the projections 62 in the receptacles also aligns the display aperture 42 with the display 12, the speaker apertures 52 with the speaker 16 and the microphone aperture 54 with the microphone 18.

According to another embodiment of the invention, the elastomeric sheet 64 may extend over the entire interior of the flexible cover 40. This provides an additional shock absorbing layer to the exterior material of the flexible cover 40 and also provides additional waterproofing. In some embodiments, the elastomeric sheet 64 may extend over the display aperture 42 to increase the waterproofing.

The flexible cover 40 may be replaced by a user. For example one flexible cover 40 may be interchanged with another flexible cover to change the appearance of the phone.



Although the present invention has been described in the preceding paragraphs with reference to particular examples, it should be appreciated that various modifications and variations may be made thereto without departing from the scope of the invention as claimed.

Whilst endeavouring in the foregoing specification to draw attention to those particulars of the invention believed to be of material importance it should

be understood that the Applicant claims protection in respect of any patentable feature or combination of features hereinbefore referred to and/or shown in the drawings whether or not particular emphasis has been placed thereon.

CLAIMS

1. A mobile telephone comprising:
an engine assembly comprising a display and a plurality of switches; and
a flexible cover overlying, without an intermediate rigid cover, and snugly fitting the engine assembly and comprising an aperture aligned with the display and an integrated keypad, for user input, aligned with the plurality of switches.
2. A mobile phone as claimed in claim 1, wherein the flexible cover is made from flexible material which defines a cavity for receiving the engine assembly and has an insertion aperture through the material to the cavity through which the engine assembly can fit.
3. A mobile phone as claimed in claim 2, further comprising means for closing or restricting the insertion aperture after the engine assembly has been inserted.
4. A mobile phone as claimed in any preceding claim, wherein the integrated keypad has a plurality of key portions on an exterior surface of the flexible cover and a plurality of corresponding projections on the interior surface of the flexible cover, each of said projections being arranged to actuate one of the plurality of switches of the engine assembly.
5. A mobile phone as claimed in any preceding claim, wherein the flexible cover and the engine assembly have corresponding projections and receptacles for aligning the flexible cover correctly with the engine assembly.
6. A mobile phone as claimed in any preceding claim, wherein the flexible cover is made from fabric, elastically deformable material, or leather.
7. A mobile phone as claimed in any preceding claim, wherein the flexible cover is substantially formed from a single piece of material.

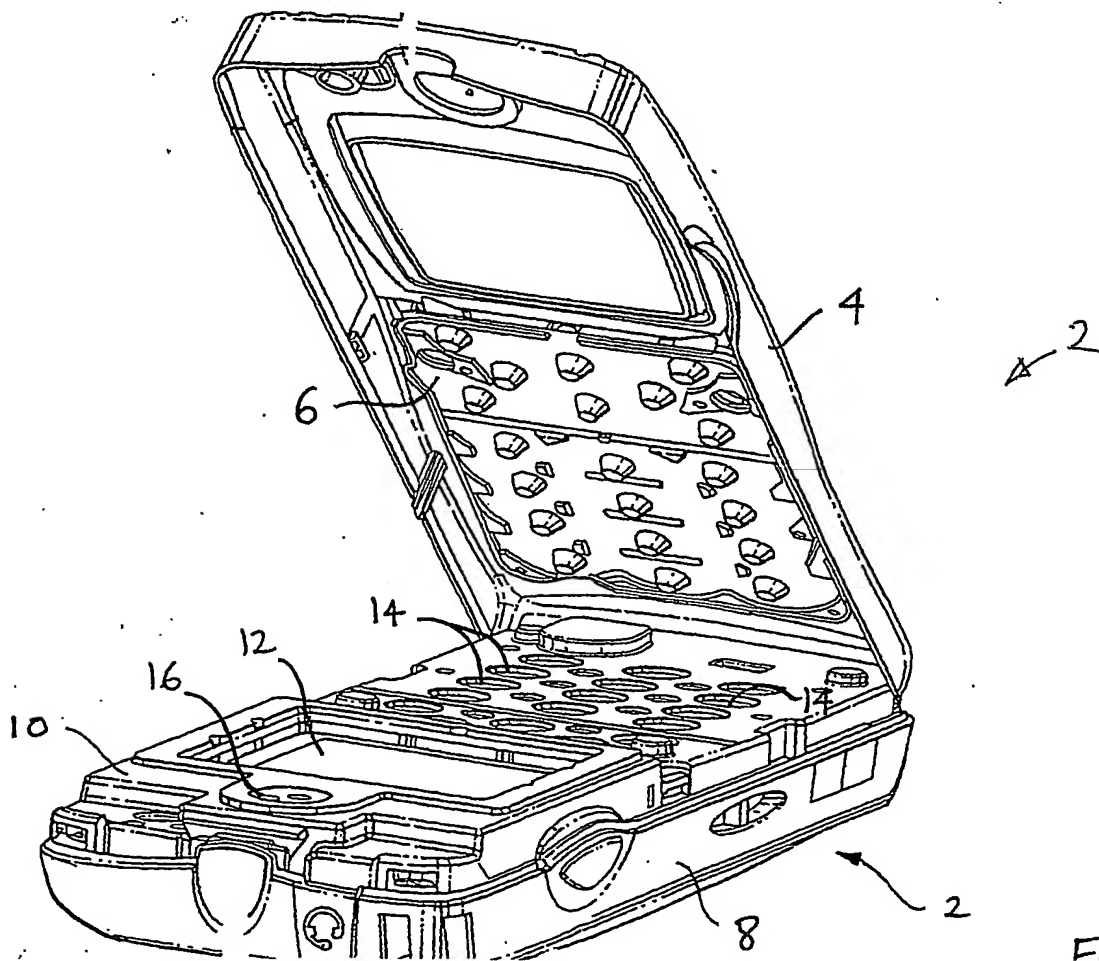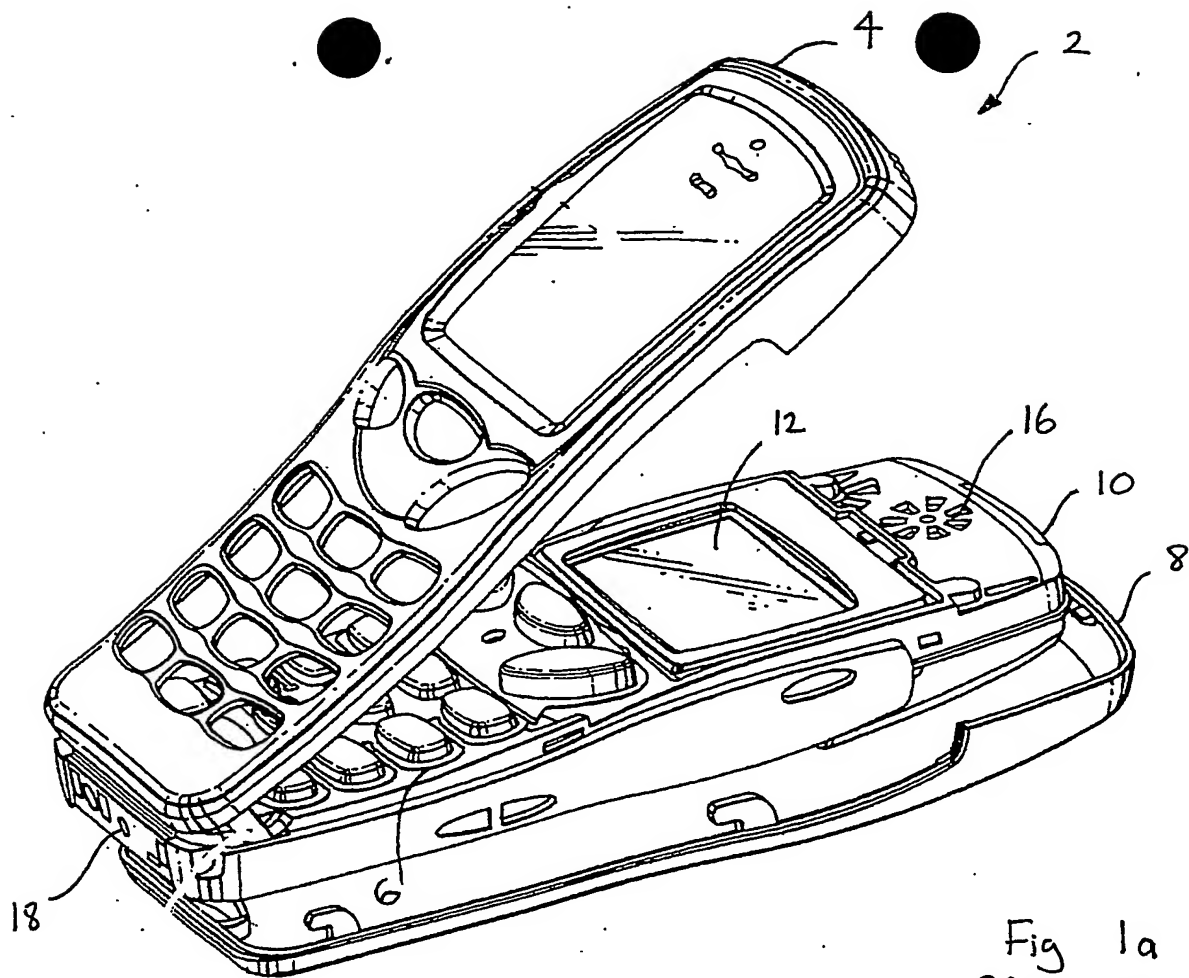





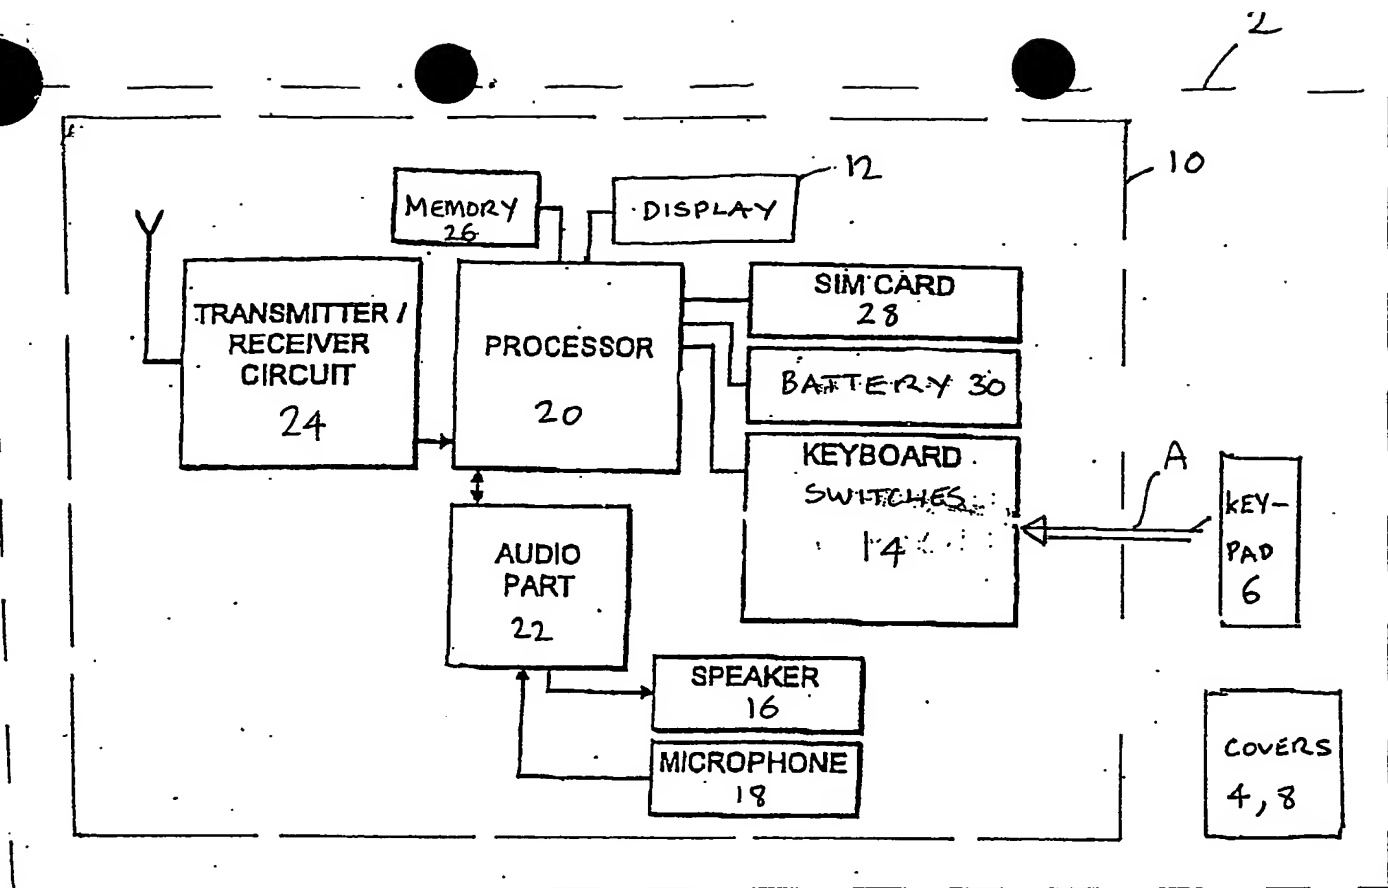


Fig 2
PRIOR ART

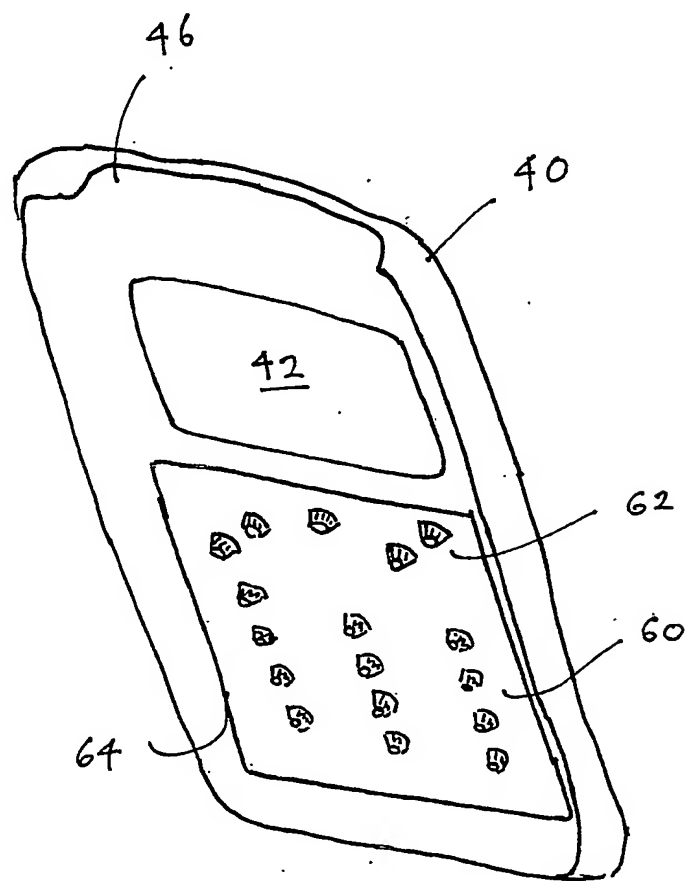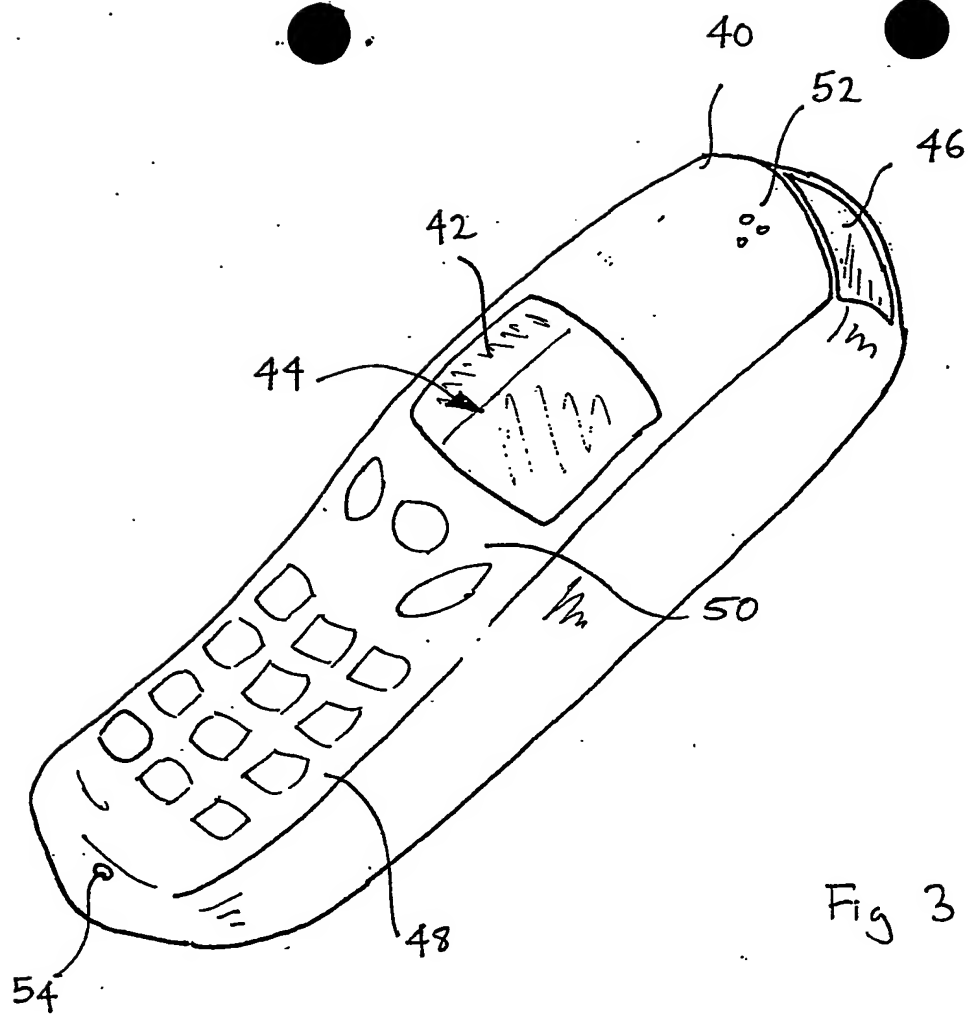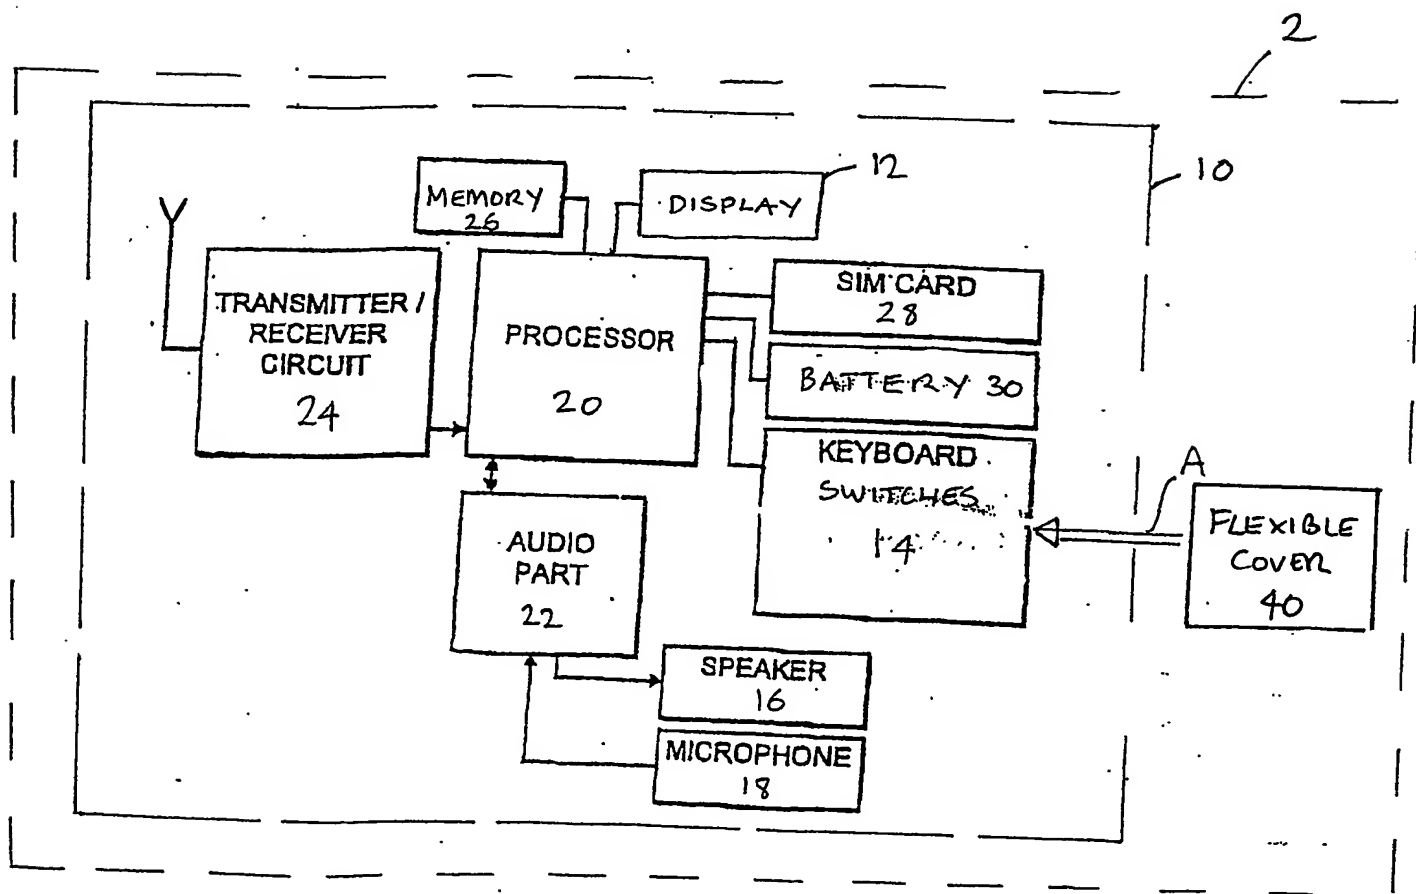

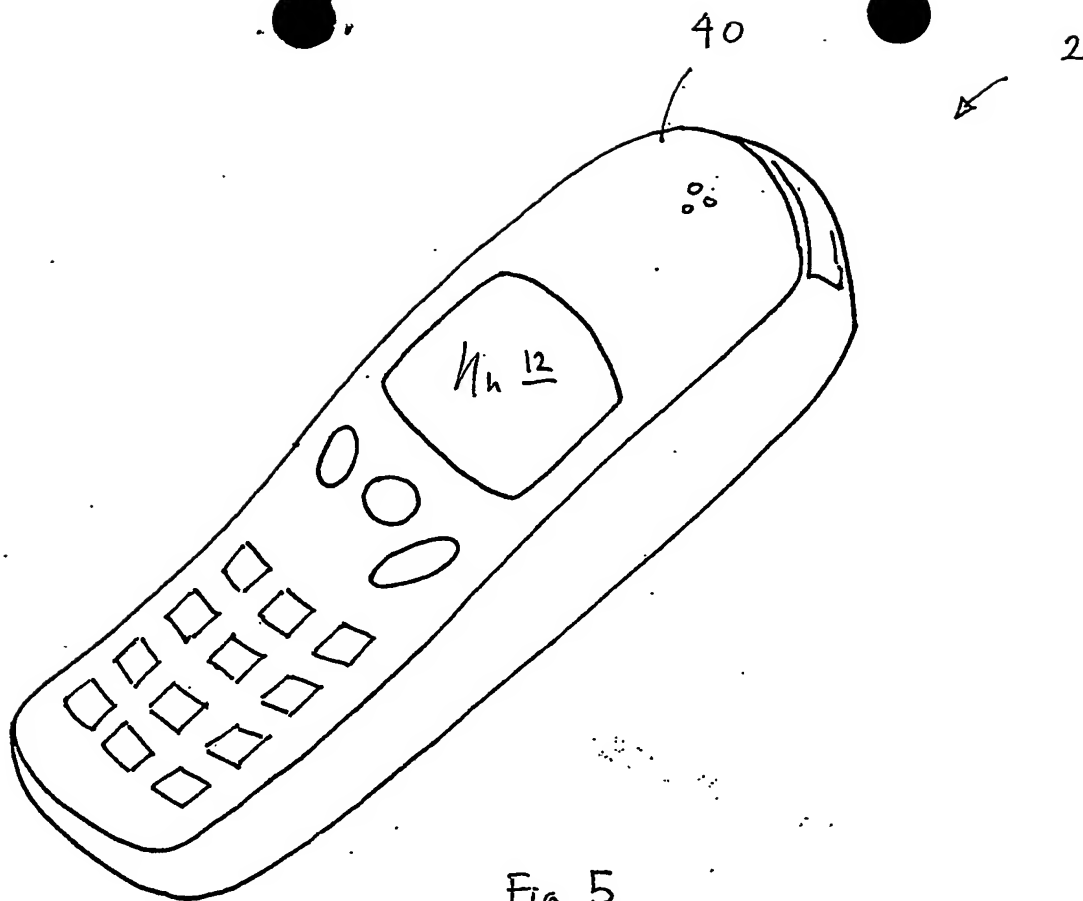

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.